





**Step 1:** Park wipers in the up position by turning off ignition mid-sweep. Keep the blades parked on the windshield and open the hood.




**Step 2:** Remove the 8mm hex-head screw from the plastic shroud located on the passenger side of engine compartment closest to the windshield.

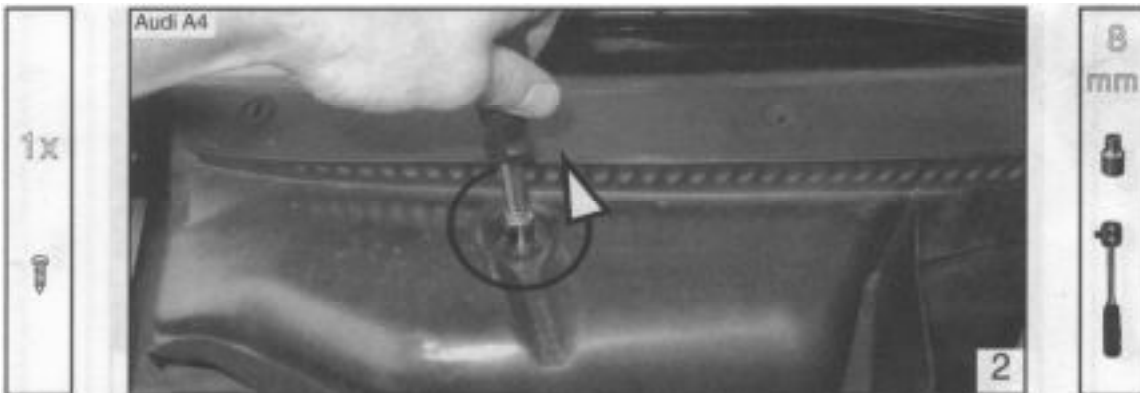

**Step 3:** With a flat-head screwdriver, turn the three plastic "screws" located in the plastic windshield trim piece 1/2 of a turn. The 1/2 of this trim piece closest to the passenger side of the car can now be separated from the other 1/2 of the trim piece located on the driver's side.

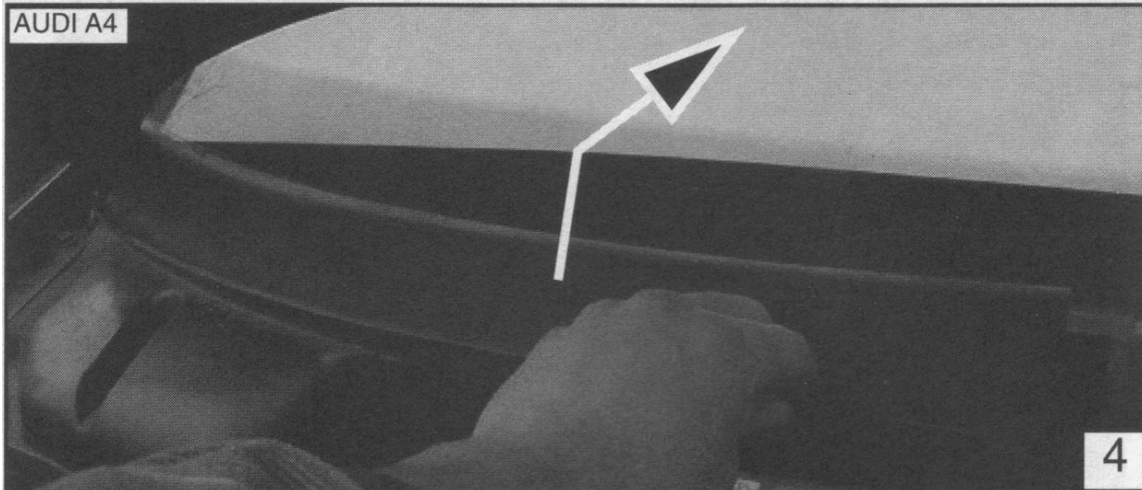

**Step 4:** Remove the plastic windshield trim piece.

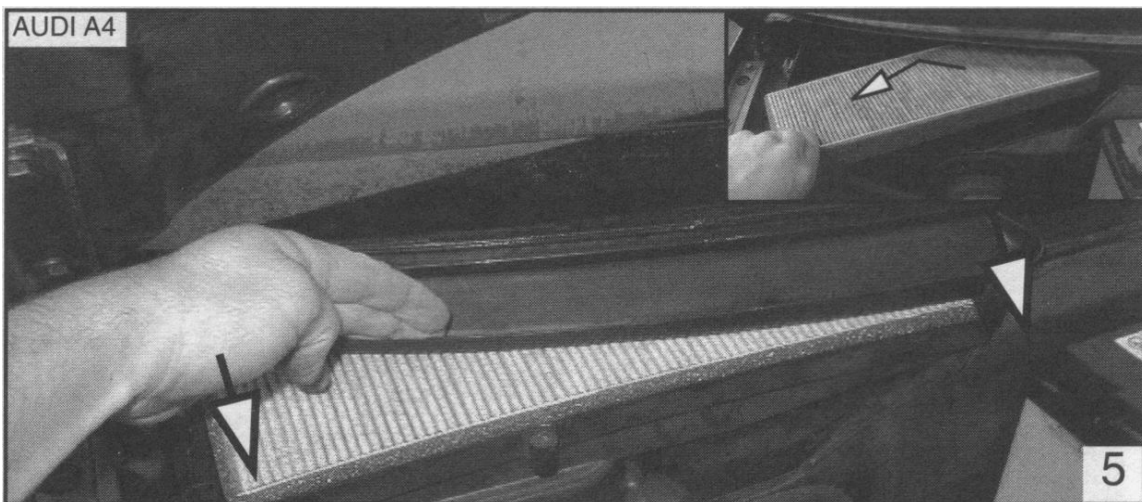

**Step 5:** Remove water-catch trim piece by pulling it straight out towards the front of the car. Two metal clips hold it in, one on each side of the trim piece. Remove old dust/pollen filter. Clean out any debris from the blower-fan area with a vacuum.



**Step 6:** Insert new dust/pollen filter. Reinstall water-catch trim piece by sliding it towards the windshield. Make sure it seats fully in both clips (see inset photo). Reinstall remaining trim pieces.